



Fencing System
LINKLAND®



Anping Linkland Wiremesh Products Co., Ltd.



GARRISON FENCE

www.linklandfence.com
E-mail: Sales@linklandfence.com

"Galvanized steel picket fence with absolute advantage over the wrought iron & stainless steel fence."

Linkland Fence is a professional metal fencing manufacturer. We always adhere to the principle of service innovation and continuously improve service and support capability. Provide prompt and thoughtful service to all users is our duty. Thanks for your trust and support, we will do it better!




Garrison steel picket fence is refer to a kind of barrier that based of hot-dip galvanized steel strip as raw material. It is a artificial barrier used to demarcate boundaries. Due to its high strength, high hardness, exquisite appearance, bright color, it is a mainstream product used in commercial, industrial, residential, municipal construction and other fields.

Feature

- Dignified and generous.
- Non-welding, assembly design.
- Four layers of anti-corrosion treatment.
- Anti-oxidation and weather resistance.
- No cracking, no embrittlement.
- Various color are available.


- Style Diversification, yet good deterrent effect.
- Never rust and good impact resistance.
- Quick and easy installation.

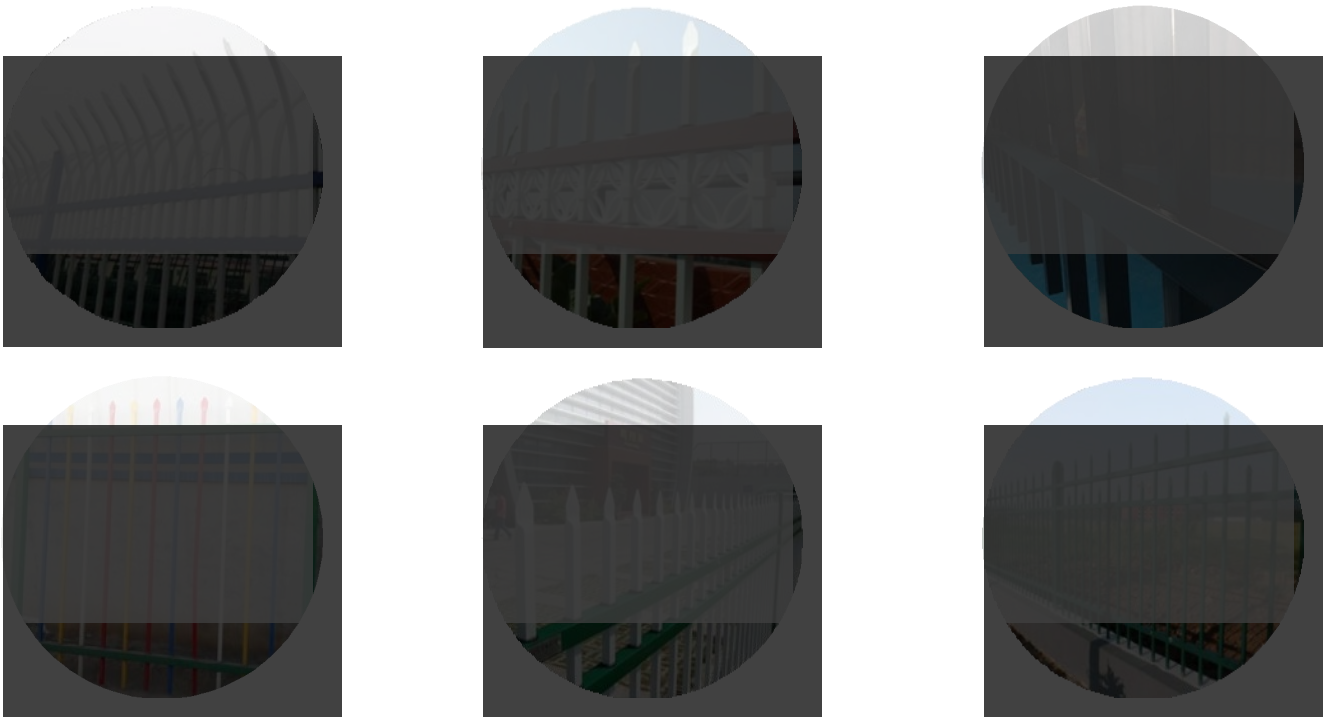


Specification

- **Name:** Garrison fence, steel picket fence, garrison tubular steel fence, galvanized steel tubular fence, tubular security fence, ornamental fence.
- **Material:** Hot-dip galvanized steel strip.
- **Panel height:** 0.8–3m.
- **Panel width:** 2.4–3.0m.
- **Rails:** 32 × 32, 40 × 40, 45 × 45, 50 × 50, 38 × 38 mm, etc.
- **Rail thickness:** 0.8–2.0mm.
- **Vertical picket**
 - **Square tube:** 16 × 16, 19 × 19, 25 × 25 mm, etc.
 - **Round tube:** 22 × 22mm.
 - **Oval tube:** 12 × 25mm.

- **Vertical picket thickness:** 0.8–1.5 mm.
- **Picket center:** 110mm.
- **Post:** 50 × 50, 60 × 60, 65 × 65, 75 × 75, 80 × 80 mm, etc.
- **Post thickness:** 1.2–2.0mm.
- **Hot-dip process:**
 - **Galvanized after forming**
 - **Zinc coating:** $\geq 92\text{g/m}^2$.
 - Thermo setting coating containing zinc (interior surface):** ≥ 0.3 mils.
 - Coverage rate of polymeric coating:** $\geq 95\%$.
 - **Galvanized after forming**
 - **Zinc coating for industrial applications:** $\geq 276\text{g/m}^2$.
 - Zinc coating for commercial and residential applications:** $\geq 184\text{g/m}^2$.
 - Polyester/epoxy and polyester combinations coating:** ≥ 0.3 mils.
 - Polyolefin elastomer coating:** ≥ 7 mils.
 - PVC coating:** ≥ 10 mils.
- **Yield strength:** $\geq 310\text{MPa}$.
- **Connection type:** Plug-in assembly.
- **Color:** Green, gray, blue, yellow, white, black, any color available according to customer's requirement.
- **Package:** Standard pallet with packaged into thin film, bubble film for unit inside, woven bag for unit outside, or according to your requirements.

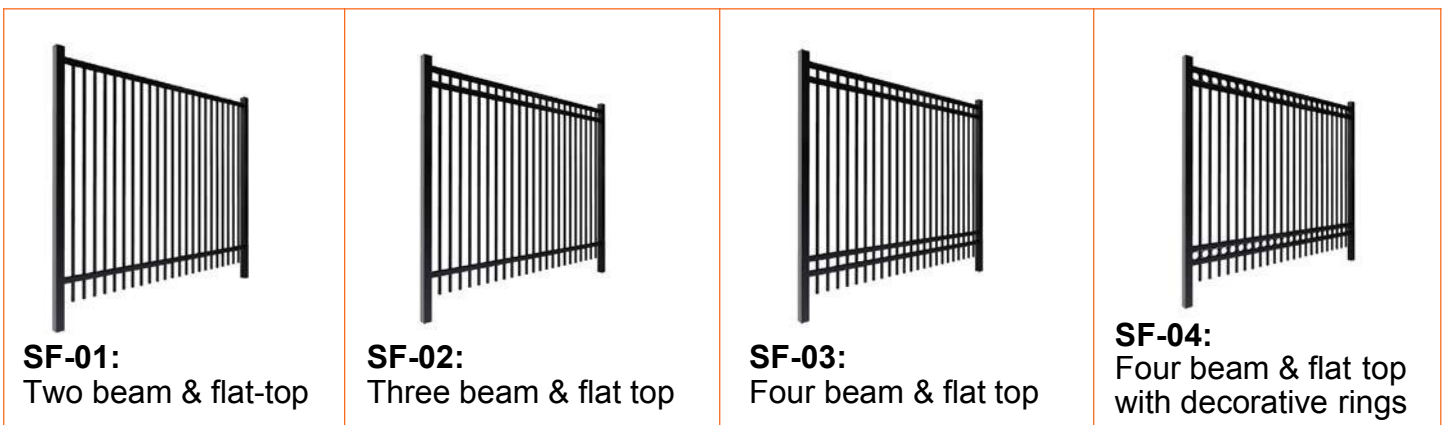

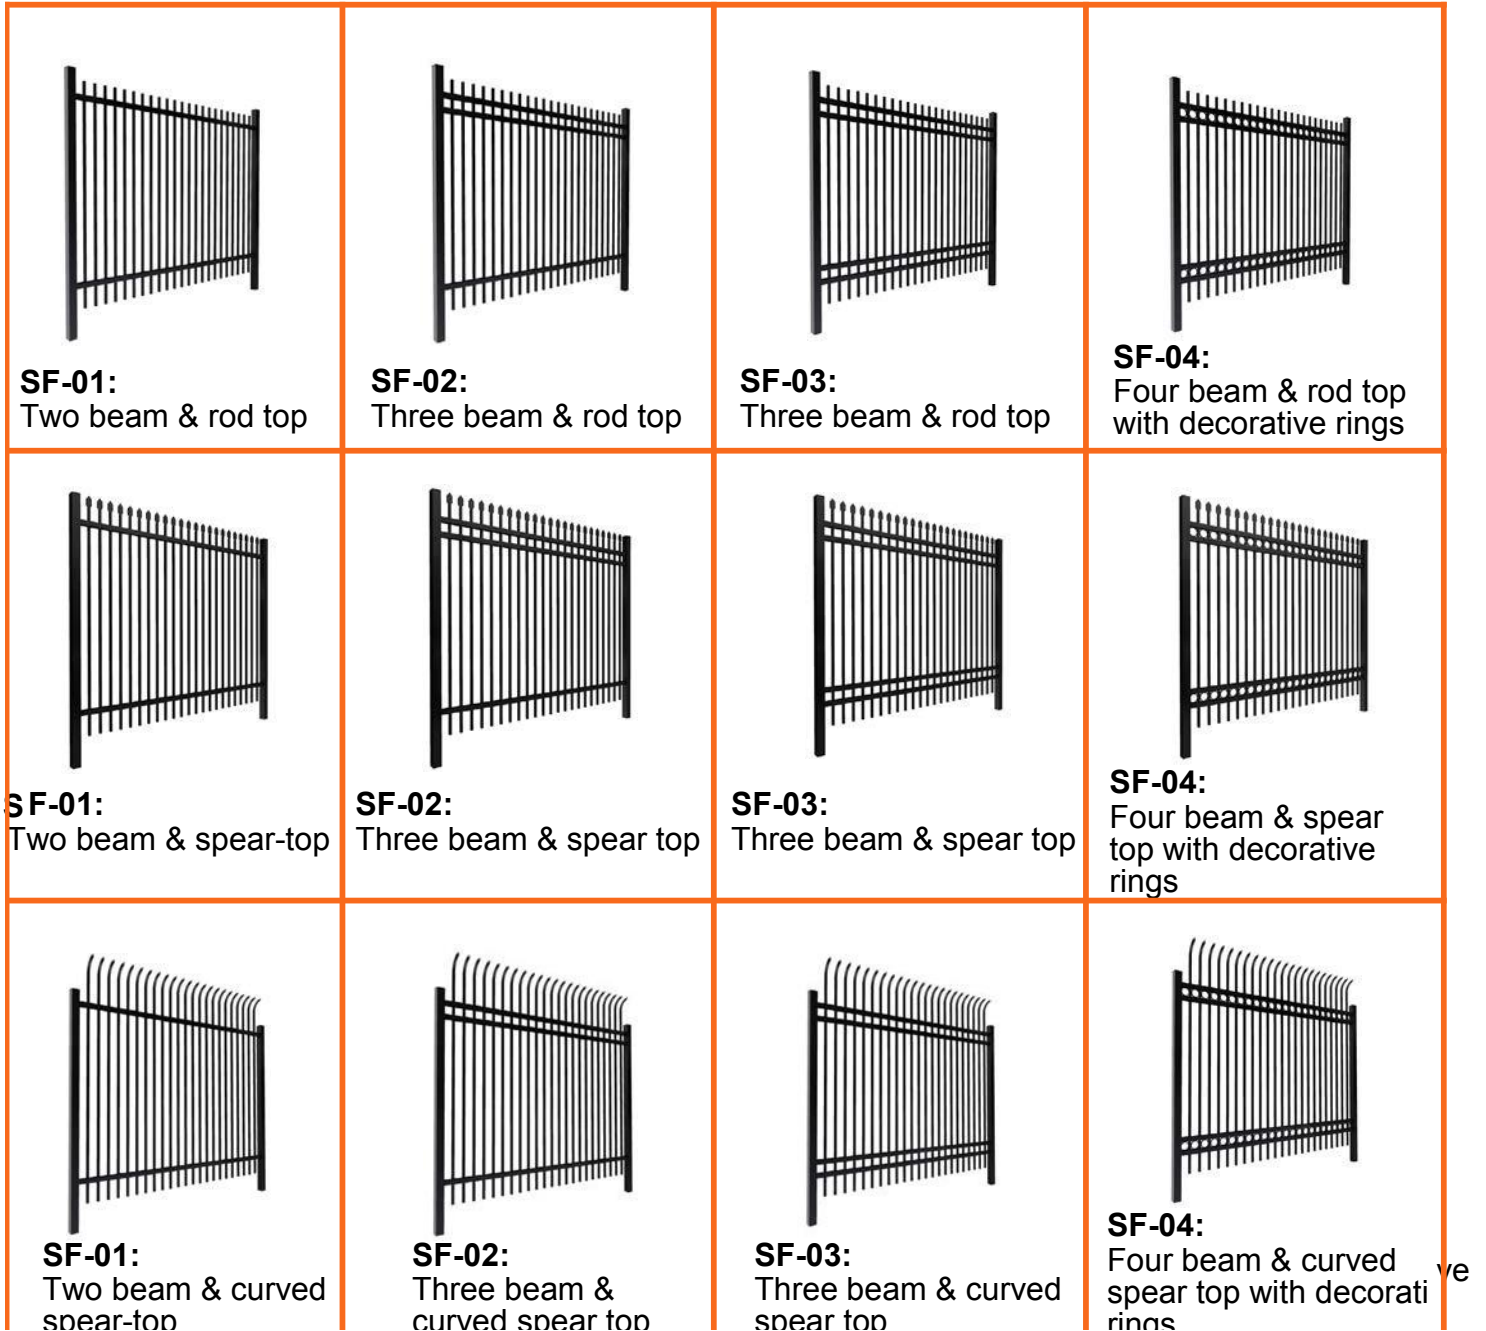

Hot specification


Code	Cross rail (mm)	Vertical picket (mm)	Post (mm)	Standard height
WG45	45×45×1.2	25×25×10	80×80×1.5	1.0 m/1.2 m/1.5 m/1.8 m
WG40	40×40×1.0	19×19×0.8	60×60×1.5	
WG32	32×32×1.0	16×16×0.8	50×50×1.2	

Process

Each of the 20 fine process is a commitment to quality.



Base material

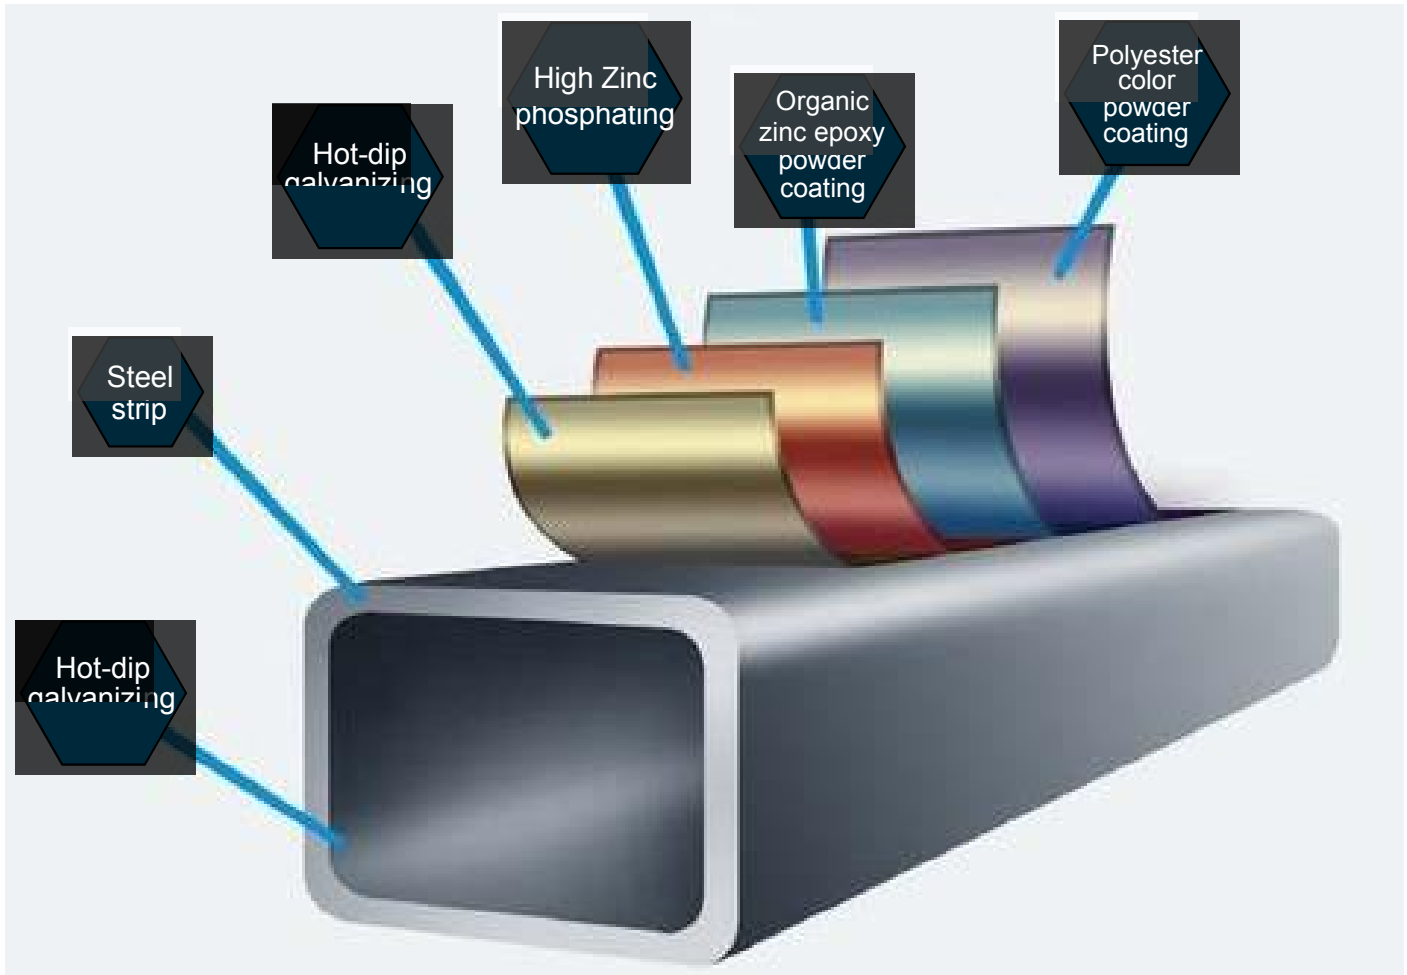

- **Base steel**, hardness value is 159DPN.
- **Zeta layer**, a layer of dense alloy near the substrate. The structure is complex and have strong corrosion resistance. With FeZn7 and FeZn13, the hardness value was 211 DPN, and the Fe content was 7%–11%.
- **Delta layer**, significant monoclinic columnar tissue, Fe content is 6%, it is non-toxic and corrosion resistant, the hardness value was 179 DPN.
- **Eta layer**, dense hexagonal crystal system. Deformation processing is not easy to crack, Zinc purity is 98.5%, the hardness value was 70 DPN.
- **High zinc phosphating layer**, it is high corrosion resistant and strengthen the adhesion of film and substrate.
- **AkzoNobel high temperature curing layer**, with excellent corrosion resistance and impact resistance, it is also anti-ultraviolet, anti-oxidation and good surface self-cleaning properties. The color change rate of 15 years is not more than 5%.



Galvanized steel fencing identification precaution

- **Check whether the surface of galvanized steel fence is smooth.** Generally speaking the surface is very smooth belongs to the high quality garrison fence. And the inferior galvanized steel fence surface is rough even rugged. The reason for this inferior products mainly raw materials themselves are not uniform, impurities. Or factory equipment and production processes are defective, resulting easy to stick steel and leave scar in production process of garrison fence.
- **Check to see whether the galvanized steel fence has broken line.** The surface of a high quality garrison fence should have a regular texture. If not, it means that the merchant in the process of the garrison fence production in order to pursue quantity and neglect the quality. The strength of the steel is greatly reduced.
- **Check whether there are cracks in the surface of galvanized steel fence.** Noted, there are four layers of anti-corrosion treatment for quality garrison fence, it is never rust or crack.
- **Check whether the section of galvanized steel fence is smooth.** In general, we can learn the production ability of the garrison fence manufacturer from its section. Walcoom always remember that detail is the key to success. This is whether the producer pays attention to the embodiment of strict quality control.
- **Check the metallic sheen on the surface of galvanized steel fence.** The high quality garrison fence surface should with a very extremely metallic feeling and bright color. If the producer use hot galvanized steel coils as the raw material and electrostatic spraying surface treatment. These are completely achievable.



Installation

• **Operation requirement**

- Get ready for the installation tools you need to use.



Steel tape



Hexagonal wrenches




Dicing saw



Electric drill

- Check whether the accessories are complete according to the accessories list.

Accessories

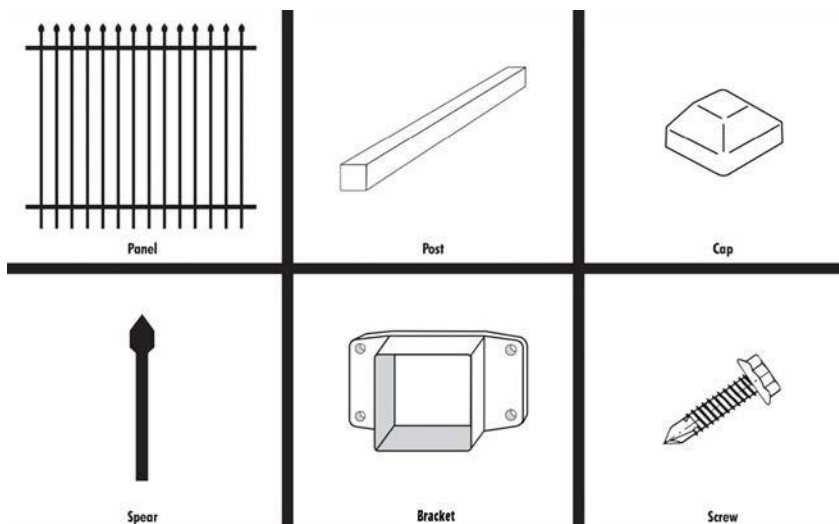

- **Railing assembly**

- The assembly site requires a flat carpet or paper cover to avoid the scratch of the product during assembly.
- **Cross rail and vertical picket connection**
 - Put the vertical picket waterproofing cover in the prepunching hole of the horizontal rail, use the rubber hammer to tap, so that the cover is fixed on the horizontal rail.
 - Put the cross rails with waterproof ring as required fixed position.
 - Put the vertical pickets one by one through the square hole until the self-locking card locked. The hole of the vertical picket should be in the same direction as the hole on the horizontal rail.
- **Post and cross rails connection**
 - Install the connection block on the post. The side post only holds a link block in one direction.
 - Locking stainless steel tamper screws on the connecting block.
- **Pipe and post connection**
 - Draw the position of the fixed screw according to the drawing.
 - Connect the pipe to the base clip and tapping on the side with a rubber mallet.



Pipe



Pipe and base clip

- **Fence installation**

- **Primary layer treatment**
 - There should be no shortening in the base concrete, and installation elevation should comply with the design requirements. The uneven surface must be removed or repaired. Cement mortar shall not be used to repair the serious honeycomb surface. Application of high-strength concrete repair, wait until there is a certain intensity before the railings can be installed.
- **Pipe fixed**
 - Draw the installation position according to the drawing and fasten it with the pop-rivet.
- **Post installation**
 - First, determine the position of the fixed point, and then punching with percussion drilling. Finally install and fix the expansion bolt. Note that this takes two people to complete. A person holds the post to make sure it stays upright, while another fasten all the screws.

Application

Galvanized steel tubular fence widely used as ornamental fence for industrial, agricultural, commercial, residential and municipal construction.

- Airport & harbor fencing.
- Residential allotment fencing.
- School security fencing.
- Station fencing.
- Garden & lawn fencing.
- Factory & hotel fencing.
- Parking lot fencing.
- Park & pool fencing.
- Power station fencing.
- Highway & railway roadside fence.
- Supermarkets & entertainment venues fence.
- Balcony protective fence.
- Stairway guardrail.
- City road isolation guardrail.



GARRISON FENCE

Anping Linkland Wiremesh Products Co., Ltd



Add: No.69-70 The Filter Industrial Part of Anping ,Hebei, China P.O 053600
Call Us :+ 86 180 3388 9188
E-Mail : Sales@linklandfence.com
F-www.linklandfence.com

